ZOONLION

RANGE-EXTENDED HYBRID **ARTICULATING BOOM LIFT**

ZA20JEH

Comply with CE/ANSI/CSA Standard



Standard Features

	Proportional control
	All motion alarm
	Flashing beacon
	Self-closing entry gate
	Emergency descent system
١	Emergency stop button
	Auto-leveling system
١	On-board diagnostic system
	Over tilt protection system
Ì	Oscillating axle
	Load sensing system
	4.3' LED display
	Horn
	Anti-crushing device
	Fast lowering function

Accessories & Options


- Platform light
- ► AC power to platform
- ► Airline to platform
- ▶ Non-marking tire
- Battery management system (Standard feature in CE version)


HIGHLIGHTS

- ► 6kw large power range extender provides power in low electric quantity for long working hours
 - ► Fast lift system directly lowers the boom from the highest position to the ground, no need to fold the boom to improve work
 - ► Independent auxiliary power system for more secure application
 - ► Large reduction ratio reducer provides stronger gradeability
- ▶ Safe and reliable lithium battery power system equipped with BMS low-tempera-ture heating and low-temperature charging current control functions improves battery life by 30% and adapts to -20 °C cold environment.

ZOOMLION

Model	ZA	ZA20JEH	
	Imperial	Metric	
	Size		
Work Height	70ft 1in	21.38m	
Platform Height	63ft 7in	19.38m	
Horizontal Outreach	39ft 8in	12.1m	
Up and Over Height	27ft 1in	8.25m	
A - Stowed Length	28ft 10in	8.8m	
B - Stowed Width	8ft 1in	2.46m	
C - Stowed Height	8ft 3in	2.52m	
D - Platform Length	Standard: 8ft Option: 6ft	Standard: 2.44 m Option: 1.83m	
E - Platform Width	Standard: 3ft Option: 2ft 6in	Standard: 0.91m Option: 0.76m	
F - Wheelbase	8ft 3in	2.52m	
G - Ground Clearance	1ft 4in	0.4m	
Performance			
Platform Capacity	550 lb/790lb	250kg/360kg	
Drive Speed	3.23 mph	5.2km/h	
Gradeability	45	45%	
Axles Oscillation	8in	0.20m	
Turning Radius (Inside)	9ft 1in	2.78m	
Turning Radius (Outside)	18ft	5.49m	
Turntable Swing	360° cor	360° continuous	
Platform Rotation	±	±90°	
H-Tail Swing	2ft 1in	0.64m	
Max. Working Slope	3°	3°/5°	
Max. Wind Speed	28mph	12.5m/s	
·	Power	·	
Battery	48V/315Ah Li-io	48V/315Ah Li-ion battery (Li)	
Charger 48V/60A Range Extender 6kW			
		¢W	
Drive Motor			
Lift Motor	AC	AC 32V 12V DC	
Auxiliary Power			
Hydraulic Tank Capacity	19.8 (us gal)	75L	
Fuel Tank	23.1 (us gal)	105L	
		Tire	
Туре			
	Weight		
Gross	21494 lb	9750kg	



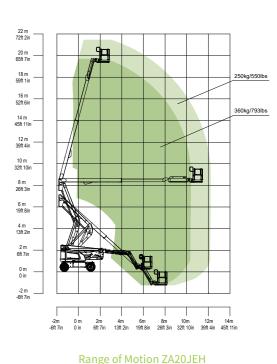

ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692 E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China Web: www.zoomlion-access.com